


Ceramic replacements beads



These special sintered alumina ceramic beads can be used for preheating and postheating of welding applications because of their excellent heat resistance.

PART NUMBER	DESCRIPTION	COLOR	QUANTITY PER BOX
PMBB	Main Body Bead (A)	Pink	2 000
PMEB	Male End Bead (B)	Pink	2 000
PFEB	Female End Bead (C)	Pink	2 000
PSTB	Small Tail Bead (D)	Pink	5 000
PBBH	Body Bead with Hole (E)	Pink	2 000
4396	Small Tail Bead (F)	White	100
4397	Tube Bead (over welding ferrules) (G)	White	100

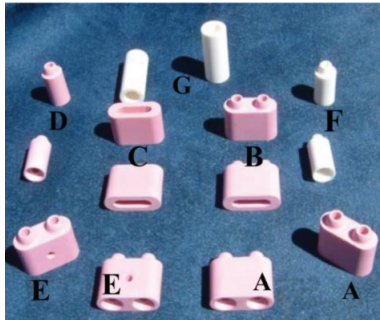

Welding ferrules :

REF. #: A33



1/2" Copper Shim (1 kg)

3/4" Copper Shim (1 kg)


Ceramic pad heater accessories



A repair kit for heating elements that comes with 80/20 nickel/chrome multi-strand wire (19 strands), nickel 212 cold tail wire (tiggered), and two complete male twistlocks 60 A.

REF. #: Kit 80 V

REF. #: Kit 60 V

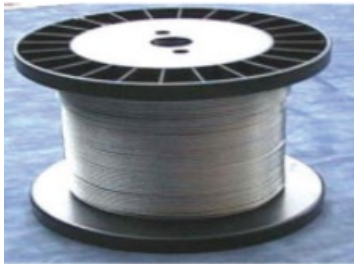

Heater Core Wire:

Consists of a 80/20 nickel-chrome alloy multi-strand wire (19 strands) on 500 m/1640' roll.

REF. #: A15-19

Nickel 212 Wire:

Low resistance multi-strand cold tail wire available in 19 strands on 100 m/328' roll.

REF. #: A17



300 A Female panel
mounted twistlock,
complete

REF. #: A10



300 A Male panel
mounted twistlock,
complete


REF. #: A11



Energy regulator (110 V)

Aluminum knob and scale

REF. #: SER-COM

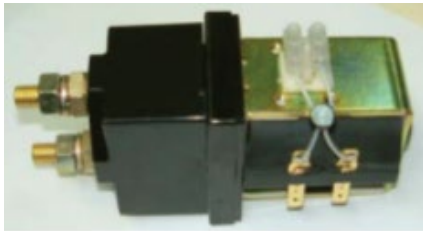

Contactor 200 A

100% Duty cycle

REF. #: A37-EL



Male thermocouple plug

REF. #: A19-K

Female thermocouple plug

REF. #: A20-K

Features: Type "K"

Simple and stable connection



Six-way panel mounted inlet-outlet thermocouple
(type "K")

REF. #: 6-way

Twelve-way panel mounted inlet-outlet thermocouple
(type "K")

Ref. #: 12-way

Female thermocouple socket (sold separately)

REF. #: F-A18



MONTREAL

(514) 645-2409

501, rue Marien Montréal-Est, QC H1B 4V8

info@smtt.ca