


Ceramic Pad Heater

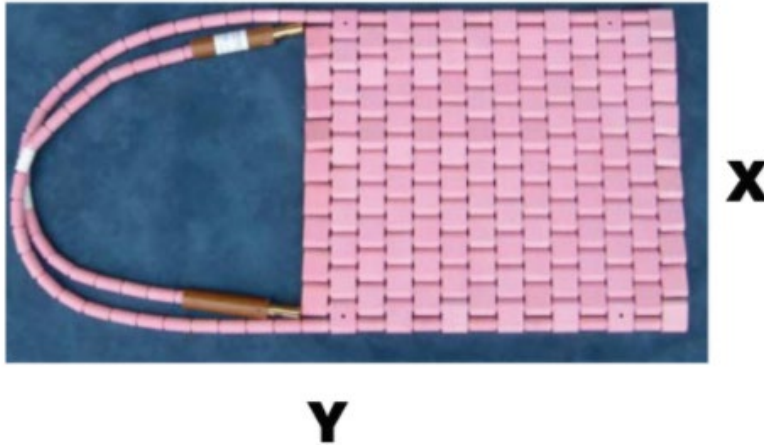

Specifications:

All flexible ceramic pad heaters are made of 80/20 nickel/chrome multi-strand wire, insulated with interlocking sintered alumina pink ceramic beads, nickel 212 cold tails (tigged) and two male 60 A twistlocks complete with insulated covers. Available in many sizes and ratings, they can be used up to 2150 °F/1176 °C in various heat treatment applications.

| MS REFERENCE | DESCRIPTION | RATING | SIZE (APPROX.) "X" X "Y" |
|--------------|------------------|-------------------------|--------------------------|
| CP3-80V | Preheater | 80 volt, 45 amp, 3.6 kW | 3" x 39" |
| CP4-80V | Preheater | 80 volt, 45 amp, 3.6 kW | 4" x 29" |
| CP6-80V | Thick Wall Pad | 80 volt, 45 amp, 3.6 kW | 6" x 20" |
| CP8-80V | Pad Element | 80 volt, 45 amp, 3.6 kW | 8" x 15" |
| CP10-80V | Pad Element | 80 volt, 45 amp, 3.6 kW | 10" x 12" |
| CP12-80V | 3" Diameter Pipe | 80 volt, 45 amp, 3.6 kW | 12" x 10" |
| CP15-80V | 4" Diameter Pipe | 80 volt, 45 amp, 3.6 kW | 15" x 8" |
| CP18-80V | Strip | 80 volt, 45 amp, 3.6 kW | 18" x 7" |
| CP21-80V | 6" Diameter Pipe | 80 volt, 45 amp, 3.6 kW | 21" x 6" |
| CP24-80V | Strip | 80 volt, 45 amp, 3.6 kW | 24" x 5" |
| CP29-80V | Strip | 80 volt, 45 amp, 3.6 kW | 29" x 4" |
| CP36-80V | Long Strip | 80 volt, 45 amp, 3.6 kW | 36" x 3.5" |
| CP70-80V | Snake | 80 volt, 45 amp, 3.6 kW | 70" x 2" |

| MS REFERENCE | DESCRIPTION | RATING | SIZE (APPROX.) "X" X "Y" |
|--------------|--------------------|-------------------------|--------------------------|
| CP3-60V | Preheater | 60 volt, 45 amp, 2.7 kW | 3" x 39" |
| CP4-60V | Preheater | 60 volt, 45 amp, 2.7 kW | 4" x 21" |
| CP6-60V | Thick Wall Pad | 60 volt, 45 amp, 2.7 kW | 6" x 15" |
| CP8-60V | Pad Element | 60 volt, 45 amp, 2.7 kW | 8" x 11" |
| CP10-60V | Pad Element | 60 volt, 45 amp, 2.7 kW | 10" x 9" |
| CP12-60V | 3" Diameter Pipe | 60 volt, 45 amp, 2.7 kW | 12" x 7" |
| CP15-60V | 4" Diameter Pipe 6 | 60 volt, 45 amp, 2.7 kW | 15" x 6" |
| CP18-60V | Strip | 60 volt, 45 amp, 2.7 kW | 18" x 5" |
| CP21-60V | 6" Diameter Pipe | 60 volt, 45 amp, 2.7 kW | 21" x 4" |
| CP26-60V | Long Strip | 60 volt, 45 amp, 2.7 kW | 26" x 3.5" |
| CP50-60V | Snake | 60 volt, 45 amp, 2.7 kW | 50" x 1.75" |



Round Magnet Assembly:

REF. : RD-2



MONTRÉAL

(514) 645-2409

501, rue Marien Montréal-Est, QC H1B 4V8

info@smtt.ca